


Ref. Code: AP047

Date: April 2016

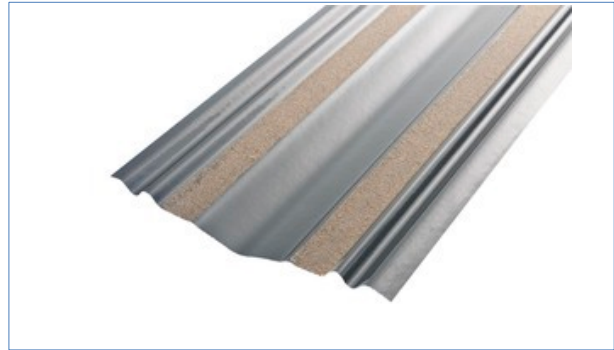

E Type Universal Valley Trough

Product Features

Corodrain valley troughs are a durable, economic alternative to lead. Corodrain E Type Valley includes 35mm wide sanded strips for mortar adhesion. Meets all the requirements for the narrow valley troughs in NFRC Technical Bulletin 28.

- BBA Approved Cert No. 89/2153
- At least durable as lead
- Similar in appearance to lead
- Less prone to theft
- Quick to install
- UV light and acid rain resistant
- Smooth surface inhibits the growth of moss & lichen and build-up of debris
- Fire resistance to SAB to BS476 part 3 and Class 3 BS476 part 7

- Suitable for use on roofs with pitches from 22.5° to 49°
- Can accommodate a maximum difference between two rafter pitches of 10°
- Designed for use with interlocking tiles, they can also with natural slate and manufactured slate

Product Specification	E Type - Standard
Length and Code	3m – HE30 , 2.4m - HE24 , 1.8m - HE18
Width	360mm
Standard Weight	1.66Kg/m ²
Thickness	1mm
Colour	Grey/Blue
Material	GRP - High quality unfilled polyester resin with glass fibre reinforcement