


Ref. Code: AP027

Date: April 2016

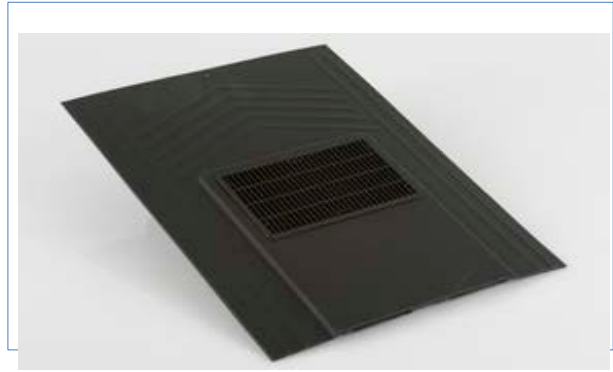

Unislate – Universal Slate Vent

Product Description

Corovent Universal Slate Vent provides a discreet and cost effective ventilation option for slate roofs.

- Universal slate vent designed to be used with natural slates.
- Grille and back box style vent incorporates a round felt sleeve to penetrate felt.
- Provides 8000mm² of ventilation.

Technical Data			
Vent	Vent Area	Roof Type	Spacing to give continuous ventilation
UNI /SLATE	8000mm ²	Natural slate	5mm at 1.6M spacing 10mm at 800mm spacing
UNI/SLATE must not be used on roof pitches below 20° degrees			

Product Specifications	
Code	UNI /SLATE
Length	420mm
Width	300mm
Material	HIPS

Product Requirements	
Statutory Requirements	To provide ventilation in accordance with Building Regs Approved Document C2 & BS5250:20011 and Building Standards (Scotland) Regulations
Functional Requirements	To give at least 8000mm ² free ventilation. The vent should give a proper fit to surrounding slates. The head and side laps must conform to the surrounding slates. Suitable for fixing in accordance with BS5534 Part 1:2014. Give minimum cutting of battens.